



Rectifier Diode Modules

SKKD 212/12

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E63532


Typical Applications*

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Absolute Maximum Ratings		Values	Unit
Symbol	Conditions		
Rectifier Diode			
I_{FAV}	sin. 180°	$T_c = 85 \text{ }^\circ\text{C}$ $T_c = 100 \text{ }^\circ\text{C}$	213 165
I_{FSM}	10 ms	$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 135 \text{ }^\circ\text{C}$	6600 5500
i^2t	10 ms	$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 135 \text{ }^\circ\text{C}$	217800 151250
V_{RSM}			1300
V_{RRM}			1200
T_j			-40 ... 135
Module			
T_{stg}			-40 ... 125
V_{isol}	a.c.; 50 Hz; r.m.s.	1 min 1 s	3000 3600

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
Diode					
V_F	$T_j = 25 \text{ }^\circ\text{C}$, $I_F = 500 \text{ A}$			1.40	V
$V_{(TO)}$	$T_j = 135 \text{ }^\circ\text{C}$			0.75	V
r_T	$T_j = 135 \text{ }^\circ\text{C}$			1.05	$\text{m}\Omega$
I_{RD}	$T_j = 135 \text{ }^\circ\text{C}$, $V_{RD} = V_{RRM}$			9	mA
$R_{th(j-c)}$	cont.	per chip		0.18	K/W
		per module		0.09	K/W
$R_{th(j-c)}$	sin. 180°	per chip		0.18	K/W
		per module		0.09	K/W
Module					
$R_{th(c-s)}$	chip		0.1		K/W
	module		0.05		K/W
M_s	to heatsink M5	4.25	5.75		Nm
M_t	to terminals M6	4.25	5.75		Nm
a			5 * 9,81		m/s^2
w		165			g

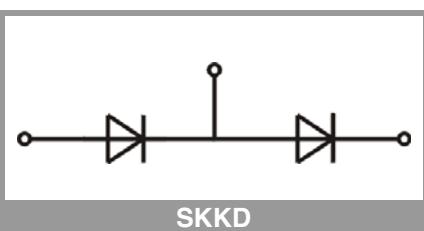

SKKD 212/12

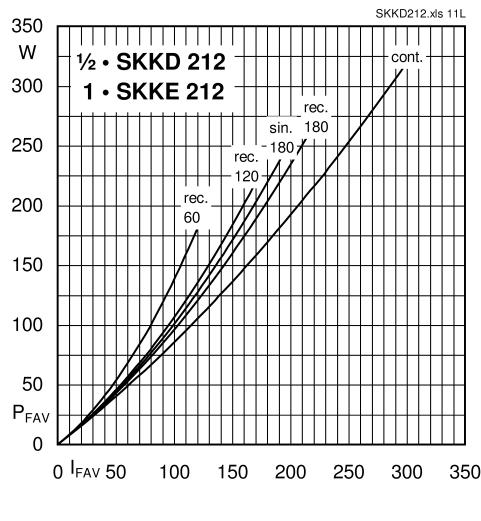


Fig. 11L: Power dissipation per diode vs. forward current

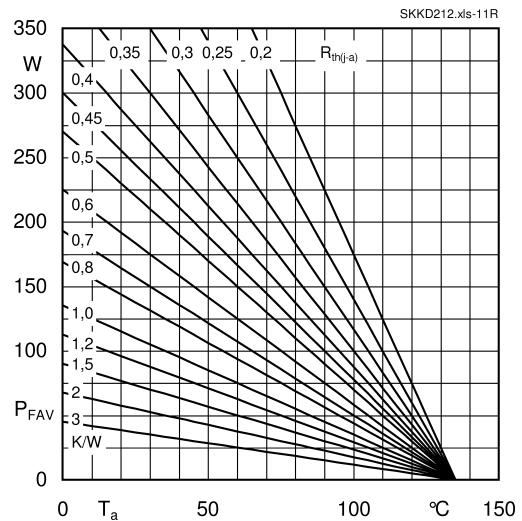


Fig. 11R: Power dissipation per diode vs. ambient temperature

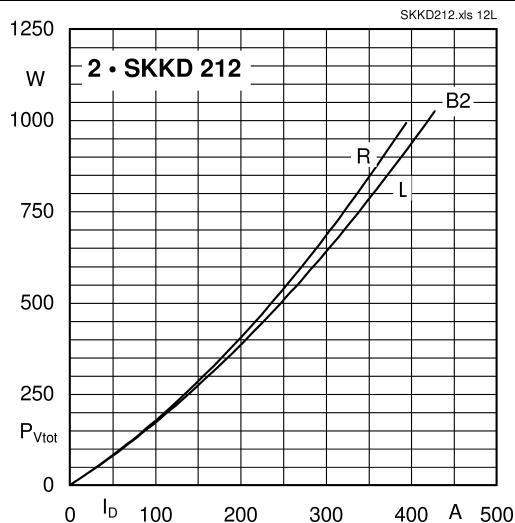


Fig. 12L: Power dissipation of two modules vs. direct current

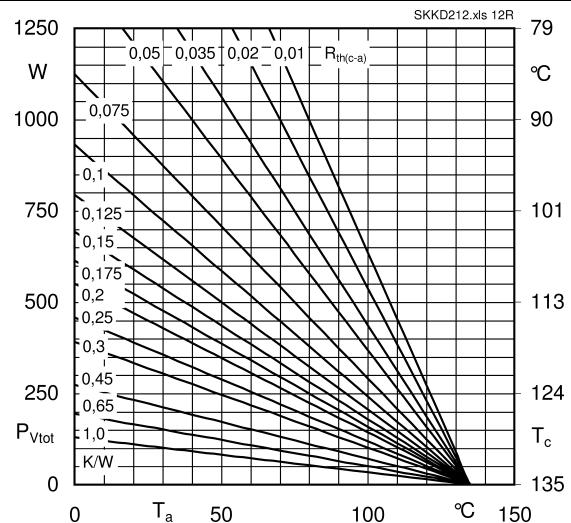


Fig. 12R: Power dissipation of two modules vs. case temperature

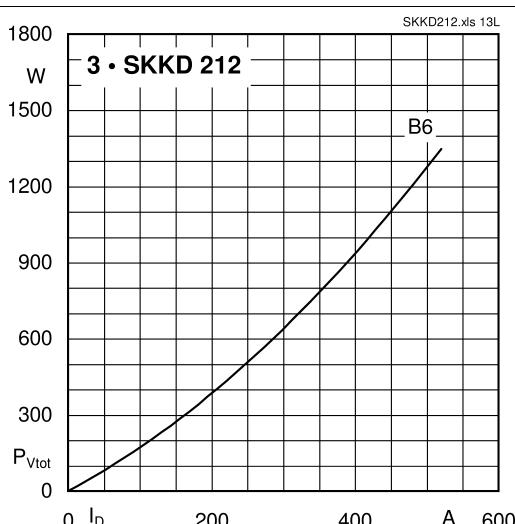


Fig. 13L: Power dissipation of three modules vs. direct current

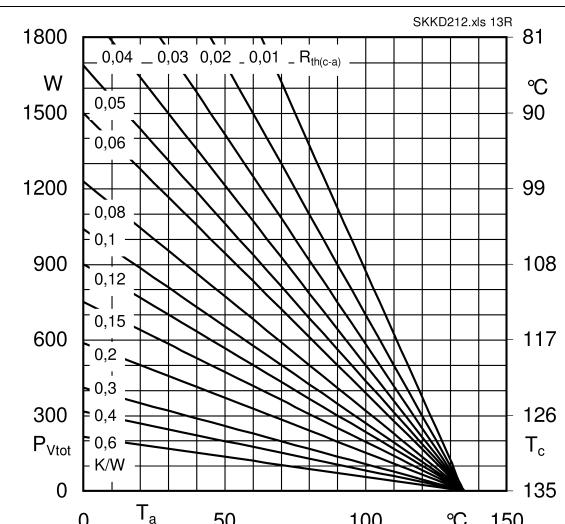


Fig. 13R: Power dissipation of three modules vs. case temperature

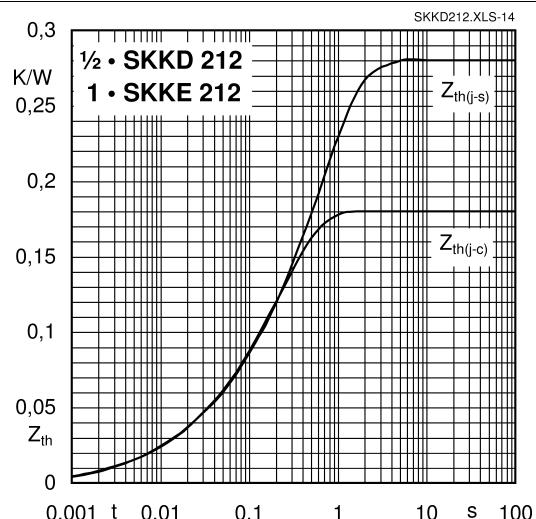


Fig. 14: Transient thermal impedance vs. time

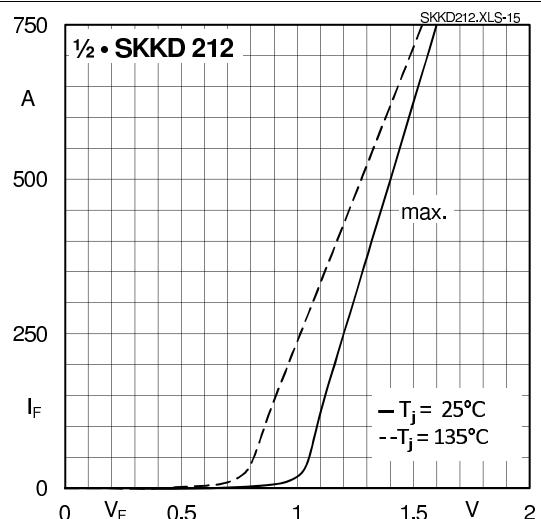


Fig. 15: Forward characteristics



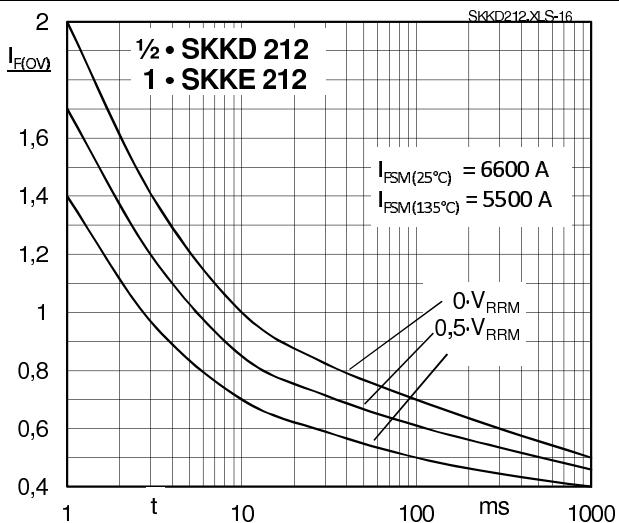


Fig. 16: Surge overload current vs. time

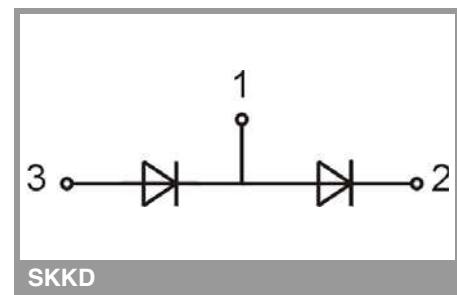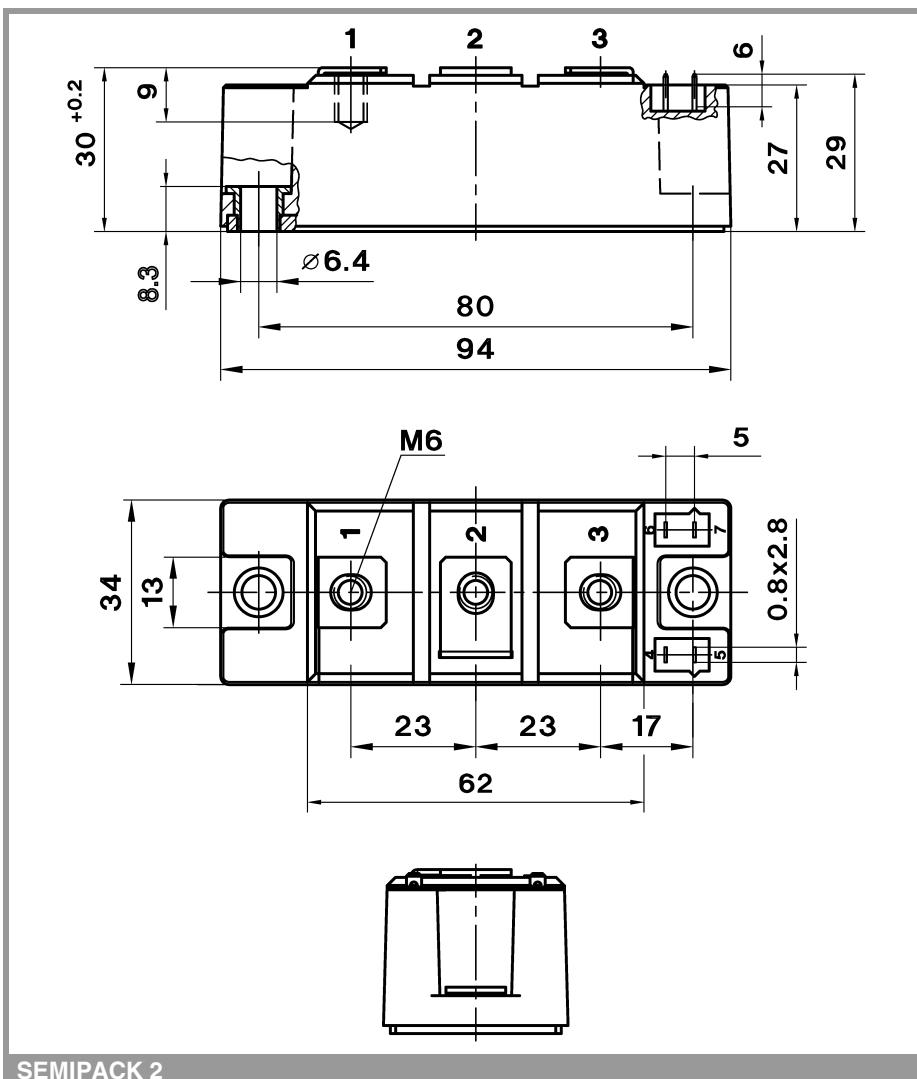

SKKD

SEMIPACK 2

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.