


P0	TN
----	----

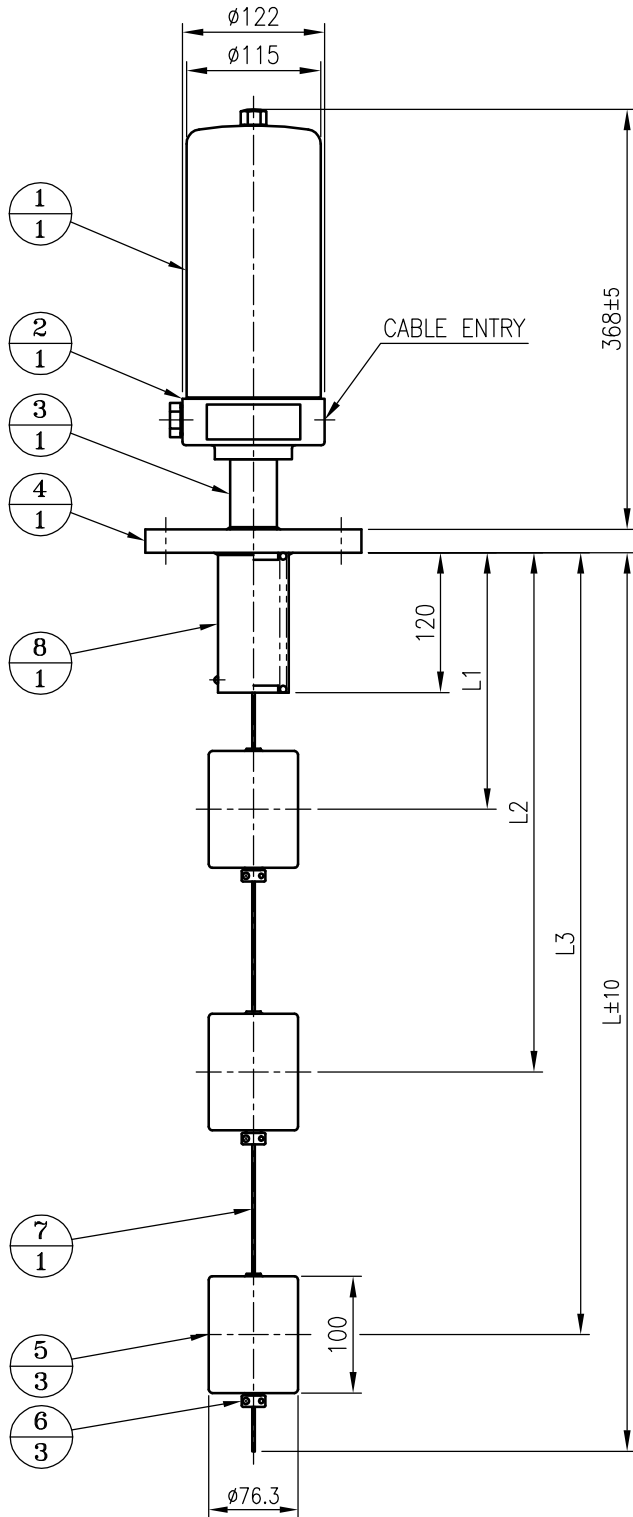

FOR	DISPLACER TYPE LEVEL SWITCH
FUNCTION	3-POINTS ALARM
MOUNTING	TOP
ENCLOSURE	WEATHER PROOF (IP65)
MAX. PRESSURE	10 kgf/cm ²
MAX. TEMP.	120 °C

CABLE ENTRY	<input checked="" type="checkbox"/> PF 3/4"(F)
	<input type="checkbox"/>

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	C.S	
2	BASE	AL.C	
3	CONNECTOR	316L SS	
4	PROCESS CONN.	<input checked="" type="checkbox"/> 304 SS <input type="checkbox"/> 316L SS	
5	DISPLACER	316L SS	
6	STOPPER	316L SS	
7	WIRE	316L SS	
8	SPRING HOLDER	316L SS	

PROCESS CONN. SIZE	DISPLACER SIZE
<input type="checkbox"/> 80A JIS 10K FF(6t,4holes)	<input checked="" type="checkbox"/> ø76.3xH100
<input checked="" type="checkbox"/> ANSI 3" 150# RF	

ELECTRICAL SPECIFICATION					
SWITCH	TYPE	MICRO			
	FORM	<input checked="" type="checkbox"/> 3-SPDT <input type="checkbox"/> 3-DPDT			
	CONTACT RATING	AC 250V, 15A DC 125V, 0.5A			
	SWITCH ACTION				
SWITCH NO.1 (L1)	<input type="checkbox"/> HIGH LEVEL (N.O) <input type="checkbox"/> LOW LEVEL (N.C)				
SWITCH NO.2 (L2)	<input type="checkbox"/> HIGH LEVEL (N.O) <input type="checkbox"/> LOW LEVEL (N.C)				
SWITCH NO.3 (L3)	<input type="checkbox"/> HIGH LEVEL (N.O) <input type="checkbox"/> LOW LEVEL (N.C)				
TAG NO.	QT'Y	L1	L2	L3	L
	1				1,880

NOTE
1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED.

△	.	.			
△	.	.			
△	.	.			
△	.	.			
△	JAN. 2017	1ST ISSUE	S W JUNG	J H CHOI	B S SUNG
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

HITROL HITROL CO., LTD.
TITLE
DISPLACER TYPE LEVEL SWITCH
HM-90-3F

SCALE	UNIT	SHEET NO.
N.S	mm	—
PROJECT		
DRAWING NO. HM90-AF-01		

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party except with our written permission