


## BXTU ML4 BD 0-180 (920 349)

- Universal voltage type with actiVsense technology
- For installation in conformity with the lightning protection zone concept at the boundaries from  $0_A - 2$  and higher
- With integrated LifeCheck monitoring



Figure without obligation



Basic circuit diagram BXTU ML4 BD 0-180

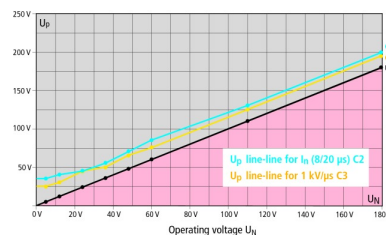


Diagram of the voltage protection level BXTU

Space-saving combined lightning current and surge arrester module with actiVsense and LifeCheck technology for protecting two pairs (same or different operating voltage) of balanced interfaces with galvanic isolation. Automatically detects the operating voltage of the useful signal and optimally adapts the voltage protection level to it.

Type	BXTU ML4 BD 0-180
Part No.	920 349
SPD class	TYPE 1 P1
SPD monitoring system	LifeCheck
Operating voltage ( $U_N$ )	0-180 V
Frequency of the operating voltage ( $f_{UN}$ )	0-400 Hz
Max. continuous operating voltage (d.c.) ( $U_C$ )	180 V
Max. continuous operating voltage (a.c.) ( $U_C$ )	127 V
Permissible superimposed signal voltage ( $U_{signal}$ )	$\leq \pm 5$ V
Cut-off frequency line-line ( $U_{signal}$ , balanced 100 ohms) ( $f_c$ )	50 MHz
Nominal current at 80 °C (equal to max. short-circuit current) ( $I_L$ )	100 mA
D1 Total lightning impulse current (10/350 $\mu$ s) ( $I_{imp}$ )	10 kA
D1 Lightning impulse current (10/350 $\mu$ s) per line ( $I_{imp}$ )	2.5 kA
C2 Total nominal discharge current (8/20 $\mu$ s) ( $I_n$ )	20 kA
C2 Nominal discharge current (8/20 $\mu$ s) per line ( $I_n$ )	10 kA
Voltage protection level line-line for $I_n$ C2 ( $U_p$ )	see diagram, line C2
Voltage protection level line-line at 1 kV/ $\mu$ s C3 ( $U_p$ )	see diagram, line C3
Voltage protection level line-line for $I_{imp}$ D1 ( $U_p$ )	$\leq U_N + 53$ V
Voltage protection level line-PG for C2/C3/D1	$\leq 550$ V
Series resistance per line	$\leq 10$ ohms; typically 7.5 ohms
Capacitance line-line (C)	$\leq 80$ pF
Capacitance line-PG (C)	$\leq 16$ pF
Operating temperature range ( $T_U$ )	-40 °C ... +80 °C
Degree of protection (plugged-in)	IP 20
Pluggable into	BXT BAS / BSP BAS 4 base part
Earthing via	BXT BAS / BSP BAS 4 base part
Enclosure material	polyamide PA 6.6
Colour	yellow
Test standards	IEC 61643-21 / EN 61643-21, UL 497B
Approvals	CSA, UL, EAC, SIL
SIL classification	up to SIL3 <sup>*)</sup>
Weight	25 g
Customs tariff number (Comb. Nomenclature EU)	85363010
GTIN	4013364126404
PU	1 pc(s)

<sup>\*)</sup> For more detailed information, please visit [www.dehn-international.com](http://www.dehn-international.com).

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.