

SKS-465 356 100 A 9002 MF

in product series SKS-465 MF


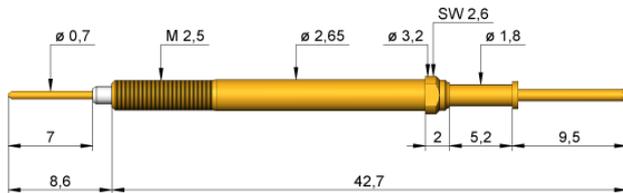


Image similar

Tip style



Tip Length 9,5 mm

Image similar

General data

Order designation	SKS-465 356 100 A 9002 MF
Variant number	SKS-465-0195
Sub product group	Switching test probes (screw-in)
Series	SKS-465 MF Quick-exchange system and plug system, screw-in
Type of installation	screw-in
Connection type at test probe	Plug
Quick-exchange system	yes
Installation height adjustable	yes
Non-rotating	no
Magnetic	yes
screw-in torque	3 - 5 Ncm

Mechanical data

Grid	3.5 mm
Total length	51.3 mm
Collar height	02
Probe barrel diameter	2.65 mm
Installation height without receptacle	16.7 mm
Working stroke	4.2 mm
Max. stroke	5.2 mm
Spring force at working stroke	9 N
Spring force at switching point	4.5 N
Contact travel	1.7 mm

Electrical data

Current load capacity / rated current	3 A
---------------------------------------	-----

Plunger head data

Tip style	56 serrated, customised length
Tip style diameter	1.00 mm
Tip length step probe	9
Disc diameter ϕ	2.3 mm
Tip style material	3 BeCu
Tip style surface	A Gold

**Operating
temperature range**

Temperature min. - 40 °C

Temperature max. + 80 °C